

# HEXAGON 950 BAR HYDROGEN ULTRA HIGH-PRESSURE SOLUTIONS



FOR TRANSPORT AND MOBILE REFUELING APPLICATIONS



HEXAGON

<b>Gas weight H<sub>2</sub> density (0.084 kg/m<sup>3</sup>)</b>	kg	25
<b>Nominal transport capacity H<sub>2</sub> (15° C)</b>	m <sup>3</sup>	276
<b>Hydraulic capacity, approx.</b>	l	510
<b>Container (length x width x height)</b>	m	3.21 x 1.32 x 0.76
<b>Net weight container, approx.</b>	kg	1247
<b>Total container weight + H<sub>2</sub></b>	kg	1272
<b>Quantity cylinders</b>	pcs	2
<b>Operating pressure (15 °C)</b>	MPa (bar)	95 (950)
<b>Burst pressure, min.</b>	MPa (bar)	224 (2240)
<b>Cylinder operating temperature min./max.</b>	°C	-40 / +82
<b>Cylinder type</b>		Type 4
<b>Cylinder liner material</b>		High density polyethylene (HDPE)
<b>Inspection standard</b>		DOT
<b>Approval</b>	Cylinders System	DOT

Note: Specifications may change without notice

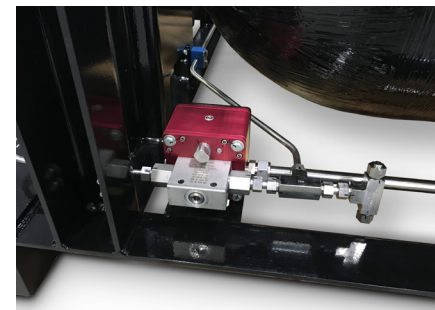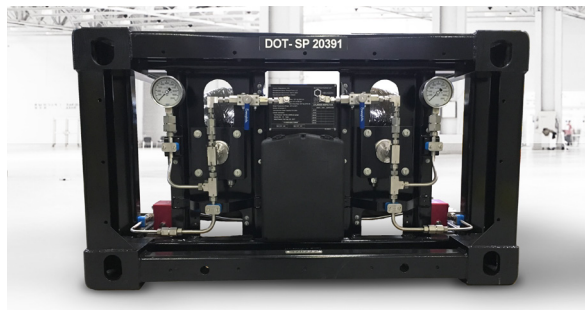

## CONTACT US:

### Hexagon Purus

Otto-Hahn-Strasse 5  
34123 Kassel, Germany  
Phone: +49 561 58549 0

5150 NW 40th Street  
Lincoln, Nebraska 68524, USA  
Phone: +1 402 470 5000

contact.purus@hexagongroup.com  
[www.hexagongroup.com](http://www.hexagongroup.com)